

## COUNTY OF LOS ANGELES FIRE DEPARTMENT FIRE PREVENTION DIVISION

## STANDARD FIRE HYDRANT BARRICADE

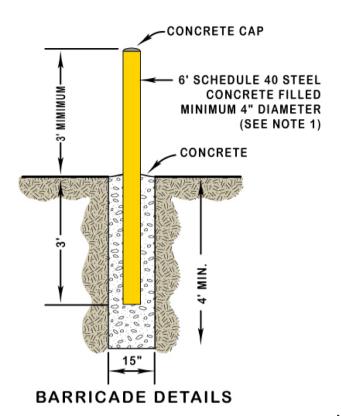


Figure 1




Figure 3




Figure 2

## Notes:

- 1. Figure 1: 6 inch diameter pipe if heavy truck traffic is anticipated. Schedule 40 steel and concrete filled.
- 2. Posts, fences, vehicles, growth, trash storage and other materials or things shall not be placed or kept near fire hydrants in a manner than would prevent fire hydrants from being immediately discernable.
- 3. If hydrant to be barricaded; no barricade shall be constructed in front of hydrant outlets. (Figure 2, shaded area)
- 4. The exact location of barricades may be changed by the Fire Inspector in the field.
- 5. The steel pipe above ground shall be painted a minimum of two field coats of primer.
- 6. Two finish coats of "Traffic Signal Yellow" shall be used for Fire Hydrant Barricades.
- 7. Figure 3 shows hydrant hook up during fire ground operations. Notice apparatus (Hydra-Assist Value) connected to hydrant and the required area. Figure 3 shows the importance of not constructing Barricades or other obstructions in front of hydrant outlets.